


TECHNICAL SPECIFICATION

Bitumen Drum Decanter fully insulated with 75 mm thick rock wool and Cladding done with GI sheet along with Hydraulically operated Mechanical 2/3/4 Lifters to load bitumen drum into heating chamber along with a complete Hydraulic power pack, Electric Panel & Skid mounted 300 lpm - Positive displacement type Bitumen gear pump with jacketed body coupled to a 10 HP Electric Motor along with a line filter to protect pump.

Model - AE 210. Capacity 3500 kg/hr.

Model - AE 310. Capacity 5500 kg/hr.

Model - AE 410. Capacity 7000 kg/hr.

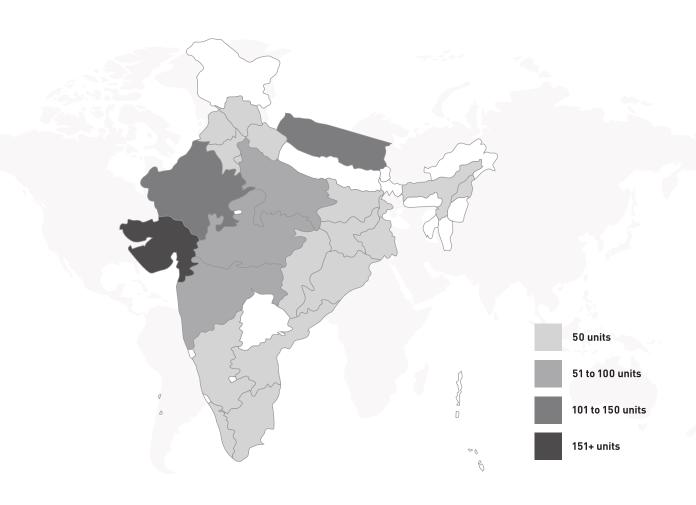

ASHITECH EQUIPMENTS PVT. LTD.

Plot No.14, G.I.D.C.-II, Dediyasan, Mehsana-384002, Gujarat, INDIA.




sales@ashitech.com info@ashitech.com



+91 97 9899 0083

+91 99 2599 5000





 * As Per Ashitech's policy of constant upgradation of products, specifications are subject to change without prior notice.